


SIGNS



- 1.) A maximum of two signs can be mounted on any one Long / Intermediate Term Stationary Portable Sign Support.
- 2.) 48" X 48" signs shall be mounted separately on the Long / Intermediate Term Stationary Portable Sign Support.
- 3.) For Short Term Stationary Portable Sign Support the distance from the bottom of the vinyl sign to the existing ground must be one (1) foot.
- 4.) Long / Intermediate Term Stationary Portable Signs must be made of wood or plastic only.
- 5.) No signs shall be mounted to any Type I, Type III, or folding barricades.
- 6.) Signs shall be mounted only on TxDOT approved sign supports.
- 7.) Detour signs will be mounted on single "D" legs w / 7' clearance from the bottom of the sign.
- 8.) **WORK DURATION TERMINOLOGY**
 Long Term Stationary = occupies a location 3 or more days.
 Intermediate-Term Stationary = occupies a location for overnight to 3 days.
 Short Term Stationary = daylight work that occupies a location from 1 to 12 hours.
 Short Duration = occupies a location up to 1 hour.
- 9.) Signs shall adhere to the following requirements:
 - Signs placed on plastic barrels or drums shall be made of ABS plastic or plywood.
 - Signs placed on skids shall be made of plywood or aluminum.
 - Aluminum signs shall have a minimum thickness of 0.08".
 - Plywood signs shall have a minimum thickness of 1 / 2".
 - ABS Plastic signs shall have a minimum thickness of 0.13".
 Plastic signs cannot exceed 18" by 24" in size and shall be reinforced with 2" wide, 0.08" thick aluminum slats, as depicted below:

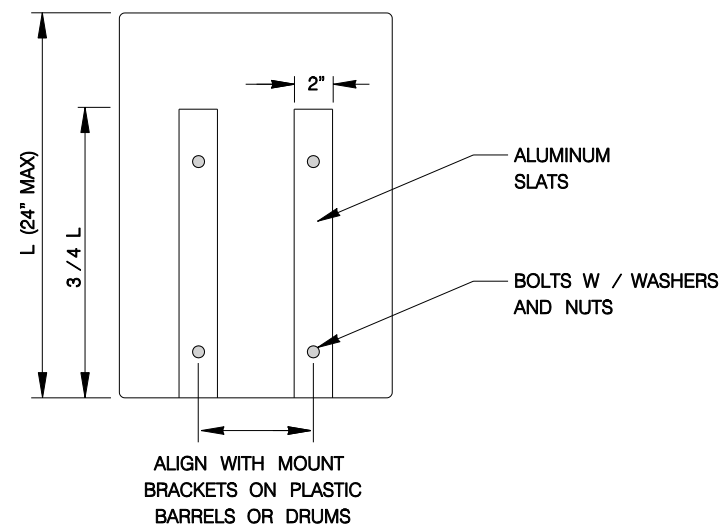

- No other material shall be accepted without the express written approval of the Traffic Engineer.

(See TxDOT BC-03 Sheets for specific construction information.)

LONG TERM / INTERMEDIATE TERM SIGN SUPPORT

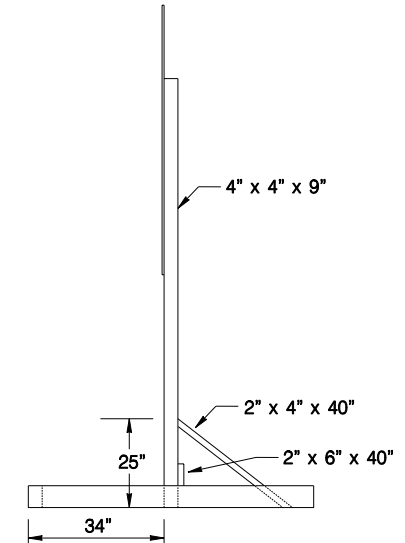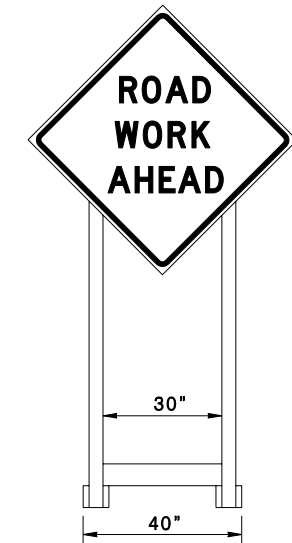

- 1.) 48" X48" signs must be mounted independently.
- 2.) A maximum of two signs can be mounted on any one long term / intermediate sign support.
- 3.) Sand bag all sign supports.
- 4.) Distance from the bottom of the sign to the existing ground shall be 7'.
- 5.) Distance from the header barricade rail to the face of the sign panel shall be 2' min. and 10' max.
- 6.) Steel tripods shall not be allowed.

(See TxDOT BC-03 Sheets for specific construction information)

JUNE 2005

CITY OF SAN ANTONIO
DEPARTMENT OF PUBLIC WORKS

TRAFFIC STANDARDS
BARRICADE AND CONSTRUCTION STANDARDS
SHEET 4 OF 4

THE ORIGINAL OF THIS DRAWING WAS SIGNED AND SEALED BY JOHN D. FRIEBELE, #46394 ON 06-20-05 AND IS ON FILE WITH THE TRAFFIC ENGINEERING DIVISION OF THE PUBLIC WORKS DEPARTMENT, CITY OF SAN ANTONIO.

DRWN. BY: A.F.G.	DSGN. BY: E.N.M.	CHKD. BY: J.D.F./E.N.M.	SHEET NO.: OF
------------------	------------------	-------------------------	---------------